


TABLOU FINISAJE - PARTER FINISHING LIST - GROUND FLOOR

NR. CRT.	RISC INCENDIU FIRE RISK	DENUMIRE SPATII ROOM DENOMINATION	SUPRAFATA AREA (mp)	PERIMETRUL PERIMETER (m)	INALTIME CAMERA HEIGHT	PARDOSELI FLOORS			PERETI WALLS			TAVANE CEILINGS			OBSERVATII NOTES
						GRESIE SANDSTONE	PARCHET PARQUET	PVC PVC SLABS	PARDOSEALA TEHNOLOGICAL FLOOR	ZUGRAV. LAV WASHABLE PAINTINGS	FAIANTA FAIANCE PLATING	DALE PLAFON FALS RIGIPS FALSE CEILING	RIGIPS CASTY PLASTER FALSE CEILING 60x60cm	ZUGRAV. LAV. WASHABLE PAINTINGS	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
P01	mic small	VESTIBUL HALL	23.60	21.60	3.35	•				•			•		
P02	mic small	CIRCULATIE CIRCULATION	24.10	24.60	3.35	•				•			•		
P03	mic small	CASA SCARII VERTICAL CIRCULATION	20.40	19.10	2.55	•				•			•		
P04	mic small	VESTIBUL HALL	5.30	9.70	3.35	•				•			•		
P05	mic small	CENTRALA TERMICA+ CENTRALA CONDITIONARE HEATING PLANT+CONDITIONING PLANT	64.80	36.60	3.35	•				•			•		
P06	mic small	GRUP SANITAR TOILET	4.20	8.40	3.35	•				•	•		•		
P07	mic small	HOL HALLWAY	2.20	6.00	3.35	•				•			•		
P08	mic small	INSTALATII AUTOMATIZARE CLADIRE SI SUPRAVEGHERE VIDEO BUILDING AUTOMATION ROOM and VIDEO SURVEILLANCE	55.10	31.20	3.35				•	•			•		
P09	mic small	GRUP ELECTROGEN DIESEL GENERATOR	71.00	38.40	4.05			•						•	
P10	mic small	TRANSFORMATOR MT TRANSFORMER ROOM	39.80	26.00	4.05			•		•			•		
P11	mic small	ACUMULATORI BATTERY ROOM	31.90	22.60	4.05	•				•			•		
P12	mic small	SUPRAVEGHERE VIDEO VIDEO SURVEILLANCE	15.90	17.90	3.35				•	•			•		
P13	mic small	RELEE TTR EQUIPMENTS ROOM	125.60	50.00	4.05			•		•			•		
P14	mic small	ELECTROALIMENTARE POWER SUPPLY ROOM	148.20	51.80	4.05			•		•			•		
P15	mic small	ACCES PRINCIPAL MAIN ACCES	21.00	22.40	3.55	•							•		gresie de ext antiderapanta
P16	mic small	ACCES SECUNDAR SECONDARY ACCES	28.30	39.40	4.05	•							•		gresie de ext antiderapanta
P17	mic small	ACCES ACCES	14.40	25.80	4.05	•							•		gresie de ext antiderapanta
P18	mic small	ACCES ACCES	14.40	25.80	4.05	•							•		gresie de ext antiderapanta

TABLOU FINISAJE - ETAJ 1 FINISHING LIST - FIRST FLOOR

NR. CRT.	RISC INCENDIU FIRE RISK	DENUMIRE SPATII ROOM DENOMINATION	SUPRAFATA AREA (mp)	PERIMETRUL PERIMETER (m)	INALTIME CAMERA HEIGHT	PARDOSELI FLOORS			PERETI WALLS			TAVANE CEILINGS			OBSERVATII NOTES
						GRESIE SANDSTONE	PARCHET PARQUET	PVC PVC SLABS	PARDOSEALA TEHNOLOGICAL FLOOR	ZUGRAV. LAV WASHABLE PAINTINGS	FAIANTA FAIANCE PLATING	DALE PLAFON FALS RIGIPS FALSE CEILING	RIGIPS CASTY PLASTER FALSE CEILING 60x60cm	ZUGRAV. LAV. WASHABLE PAINTINGS	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
E01	mic small	TERASA TERASSE	11.70	16.20		•									
E02	mic small	CIRCULATIE CIRCULATION	52.30	42.00	2.85				•	•			•		
E03	mic small	CASA SCARII VERTICAL CIRCULATION	21.60	19.90	4.85	•				•			•		
E04	mic small	GRUP SANITAR BARBATI MEN TOILET	11.40	25.60	3.15	•				•	•	•		•	
E05	mic small	GRUP SANITAR FEMEI WOMEN TOILET	8.40	19.70	3.15	•				•	•	•		•	
E06	mic small	GRUP SANITAR PERS CU DISABILITAT TOILET FOR THE DISABLED	3.80	7.80	3.15	•				•	•	•		•	
E07	mic small	VESTIAR FEMEI WOMEN LOCKER ROOM	8.30	15.50	3.15	•				•	•	•		•	
E08	mic small	VESTIAR BARBATI MEN LOCKER ROOM	8.40	15.10	3.15	•				•	•	•		•	
E09	mic small	HOL HALLWAY	15.40	20.70	2.85	•				•	•		•		
E10	mic small	BIROU INTRETINERE MAINTENANCE OFFICE	34.30	25.30	2.85				•	•			•		
E11	mic small	CAMERA DE ODIHNA LOUNGE ROOM	33.80	22.80	3.15				•	•			•		
E12	mic small	CAMERA DIAGNOSTIC DIAGNOSTIC ROOM	185.40	58.20	2.85				•	•			•		
E13	mic small	CAMERA DE PREGATIRE TRAINING ROOM	65.70	36.80	2.85				•	•			•		
E14	mic small	CAMERA DE CONTROL CONTROL ROOM	166.00	54.40	2.85				•	•			•		
E15	mic small	CAMERA DE CRIZA CRISIS ROOM	26.70	21.10	2.85				•	•			•		
E16	mic small	RESPONSABIL TRAFIC TRAFFIC RESPONSIBLE OFFICE	25.50	18.60	2.85				•	•			•		
E17	mic small	ANEXA ANNEX	9.60	12.50	2.85				•	•			•		

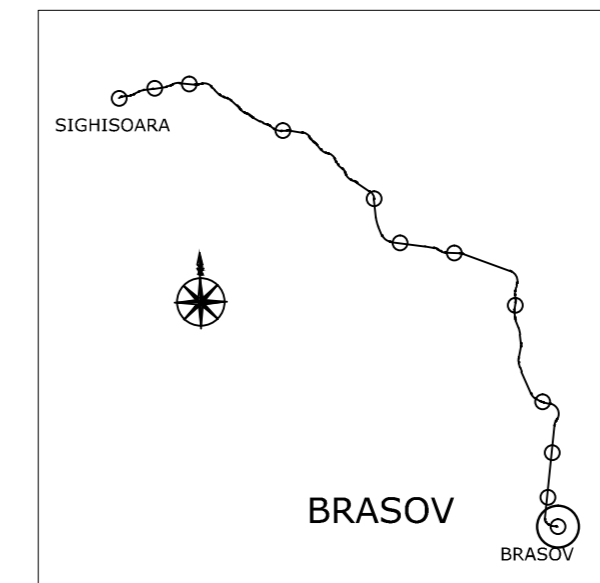

D					
C					
B					
A					
Indice Index	Data Date	Modificare Modification/Revision	Proiectant Designer	Aprobat Consultant Approved Consultant	Aprobat CFR Approved CFR
		PROIECT FINANȚAT DE UNIUNEA EUROPEANĂ EUROPEAN UNION FINANCED PROJECT			
		C.N.C.F. "C.F.R." - S.A.			
CLIENT / CLIENT					
CONSULTANT / CONSULTANT					Data Date
Aprobat Approved	Sef proiect Project manager	R. Liuzza		12.2011	Semnătură Signature
Aprobat Approved	Coordonator Secțiune 1 Section 1 Coordinator	C. Gambelli		12.2011	
Verificat Checked	Expert Cheie Checking Expert	Giuseppe Fioravanti		12.2011	
SUBCONTRACTANT / SUBCONTRACTOR					
Aprobat Approved	Responsabil Subconsultant Subconsultant Responsible	A.Stanciu - Dinulescu		12.2011	
Intocmit Elaborated	Proiectant Designer	Stefania Gheorghe		12.2011	
Reabilitarea liniei de cale ferata Braşov - Simeria, parte componentă a coridorului IV Pan European, pentru circulația trenurilor cu viteză maximă de 160 km/h, Tronsonul : Braşov - Sighişoara					Proiect/Project 2004/RO/16/P/PA/003
Rehabilitation of the railway line Braşov - Simeria, component Part of the IV Pan-European Corridor, for the trains circulation with maximum speed of 160 km/h, Section : Braşov - Sighişoara					Faza / Phase: D.E. / E.D.
Denumire desen / Drawing Title :					
STATIA BRASOV CENTRU OPERATIONAL DE COMANDA- TABLOU FINISAJE BRASOV RAILWAY STATION OPERATIONAL COMMAND CENTER - FINISHING WORK LIST					
Codificare / Codification System			Scala / Scale	LOT / LOT	Nr. / No 01 / 01
E A 5 1			0 1	E	0 1
B B			C C	0 0	1
9			0 0	6	2