


TABLOU FINISAJE - PARTER
FINISHING LIST - GROUND FLOOR

TABLOU FINISAJE - ETAJ 1
FINISHING LIST - FIRST FLOOR

NR. CRT.	RISC INCENDIU FIRE RISK	DENUMIRE SPATII ROOM DENOMINATION	SUPRAFATA AREA (mp)	PERIMETRUL PERIMETER (ml)	INALTIME CAMERA HEIGHT	PARDOSELI FLOORS			PERETI WALLS			TAVANE CEILINGS			OBSERVATI NOTES	
						GRESIE SANDSTONE	PARCHET PARQUET	PAROBELA TEHNOLOGICAL FLOORS	ZUGRAV. LAV WASHABLE PAINTINGS	PLACAJ CERAMIC CEAMIC PLATING	FANANTA FAIENCE PLATING	VOPSTORI ULI OIL PAINT	DALE PLAVON FALSE CEILING	RECEPS MURALS OF CERAMIC TILES		ZUGRAV. LAV. WASHABLE PAINTINGS
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
P01	mic small	HOL HALL	16.45	21.75	3.50	•			•							
P02	mic small	REPARTITOR DISTRIBUTING FRAME ROOM	21.50	18.65	3.50			•	•							
P03	mic small	IDM MOVEMENT OFFICE	21.45	18.60	3.50			•	•							
P04	mic small	GRUP SANITAR PERSONAL TOILET STAFF	4.50	10.50	3.50	•			•							
P05	catag D D categ	GRUP ELECTROGEN GENERATOR	21.50	18.65	3.50	•			•							
P06	mediu medium	ACUMULATORI ACCUMULATORS	21.45	18.60	4.00	•			•							GRESIE ANTIACIDA - ANTIACID SANDSTONES
P07	mic small	ACCES ETAJ FIRST FLOOR ACCES	12.45	15.00	3.50	•			•							
P08	mic small	SALVATORI TUNEL TUNNEL RESCUERS	30.25	19.00	3.50		•		•							
P09	mic small	HOL HALL	4.65	8.75	3.50	•			•							
P10	mic small	G.S. SALVATORI TUNEL TUNNEL RESCUERS WC	6.10	14.60	3.50	•			•							
P11	mic small	SALVATORI TUNEL TUNNEL RESCUERS	45.10	28.60	3.50		•		•							
P12	mic small	SEF STATIE STATION CHIEF	22.25	19.00	3.50		•		•							
P13	mic small	CASE BILETE TICKET OFFICE	22.25	19.00	3.50		•		•							
P14	mic small	HOL HALL	15.00	20.25	3.50	•			•							
P15	catag D D categ	CENTRALA TERMICA si HIDROFOR THERMAL STATION, BOILER & HYDROFORE	21.45	18.60	4.00	•			•							
P16	mic small	VESTIAR si DUS PERSONAL LOCKER and SHOWER STAFF	10.60	14.50	3.50	•			•							
P17	mic small	VESTIAR si DUS PERSONAL LOCKER and SHOWER STAFF	10.60	14.60	3.50	•			•							
P18	mic small	HOL MAIN HALL	31.85	24.55	3.50	•			•							
P19	mic small	ZONA ASTEPTARE WAITING AREA	34.50	25.90	3.50	•			•							
P20	mic small	SNACK SNACK	13.90	15.10	3.50	•			•							
P21	mic small	DEPOZIT STORAGE ROOM	6.45	11.70	3.50	•			•							
P22	mic small	HOL HALL	6.00	10.50	3.50	•			•							
P23	mic small	GS PERSOANE CU HANDICAP MAMA SI COPILUL TOILET FOR THE DISABLED BABY CARE	4.80	8.90	3.50	•			•							
P24	mic small	GS FEMEI TOILET WOMEN	3.90	9.75	3.50	•			•							
P25	mic small	GS FEMEI TOILET MEN	6.50	14.65	3.50	•			•							

NR. CRT.	RISC INCENDIU FIRE RISK	DENUMIRE SPATII ROOM DENOMINATION	SUPRAFATA AREA (mp)	PERIMETRUL PERIMETER (ml)	INALTIME CAMERA HEIGHT	PARDOSELI FLOORS			PERETI WALLS			TAVANE CEILINGS			OBSERVATI NOTES	
						GRESIE SANDSTONE	PARCHET PARQUET	PAROBELA TEHNOLOGICAL FLOORS	ZUGRAV. LAV WASHABLE PAINTINGS	PLACAJ CERAMIC CEAMIC PLATING	FANANTA FAIENCE PLATING	VOPSTORI ULI OIL PAINT	DALE PLAVON FALSE CEILING	RECEPS MURALS OF CERAMIC TILES		ZUGRAV. LAV. WASHABLE PAINTINGS
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
E01	mic small	HOL HALL	65.45	75.20	3.50	•			•							
E02	mic small	SALA COMPUTERE SI RELEE COMPUTER AND RELAY ROOM	52.95	32.15	3.20			•	•							
E03	mic small	GSM R GSM R ROOM	21.55	18.65	3.20			•	•							
E04	mic small	ELECTROALIMENTARE POWER SUPPLY ROOM	21.45	18.60	3.20			•	•							
E05	mic small	ATELIER CED IS WORKSHOP	10.70	14.50	3.50	•			•							
E06	mic small	TURANT CED IS SHIFTMAN	11.00	14.65	3.50		•		•							
E07	mic small	ACCES ETAJ FIRST FLOOR ACCES	12.45	14.95	3.50	•			•							
E08	mediu medium	SALA RELEE TTR TTR RELAY ROOM	22.25	19.00	3.50		•		•							
E09	mic small	ELECTRIFICARE ELECTRIFICATION	22.55	19.10	3.50		•		•							
E10	mic small	ELECTRIFICARE ELECTRIFICATION	22.55	19.10	3.50		•		•							
E11	mic small	ELECTRIFICARE ELECTRIFICATION	22.55	19.10	3.50		•		•							
E12	mic small	DISTRICT LINII LINES DISTRICT ROOM	22.35	19.05	3.50		•		•							
E13	mic small	CAMERA S.C.B. S.C.B. ROOM	22.55	19.10	3.50		•		•							
E14	mic small	CAMERA S.C.B. S.C.B. ROOM	22.55	19.10	3.50		•		•							
E15	mic small	VESTIAR si DUS PERSONAL LOCKER and SHOWER STAFF	11.00	18.60	3.50	•			•							
E16	mic small	VESTIAR si DUS PERSONAL LOCKER and SHOWER STAFF	11.00	18.60	3.50	•			•							
E17	mic small	DISTRICT LINII LINES DISTRICT ROOM	22.55	19.10	3.50		•		•							
E18	mic small	DISTRICT LINII LINES DISTRICT ROOM	22.35	19.05	3.50		•		•							

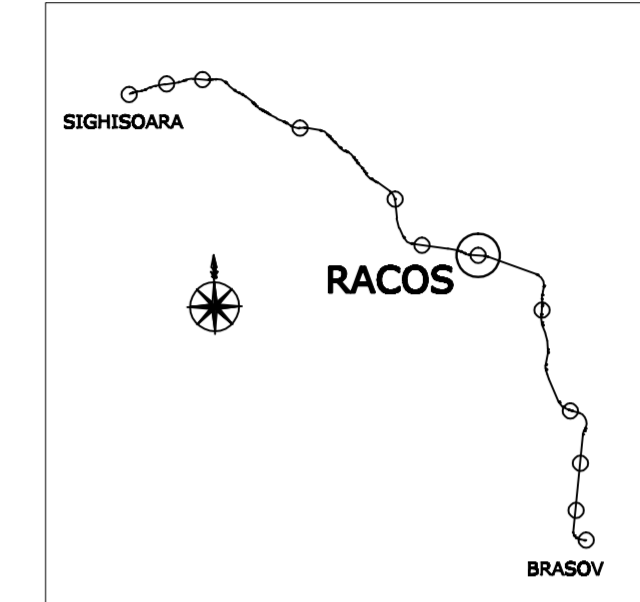

D					
C					
B					
A					
Index	Date	Modificari/Revizii	Proiectant Designer	Approbat Consultant	Approbat CFR
				PROIECT FINANȚAT DE UNIUNEA EUROPEANĂ EUROPEAN UNION FINANCED PROJECT	
		C.N.C.F. "C.F.R." - S.A.			
GRUPPO FERROVIE DELLO STATO Joint Venture Leader		FLANEN + BERATEN GmbH	Consulting Engineers		
CONSULTANT / CONSULTANT					Date 12.2011
Approbat Approved	Șef proiect Project manager	R. Luzza		Semnatul Signature	
Approbat Approved	Coordonator Secțiune 1 Section 1 Coordinator	C. Gambelli		12.2011	
Verificat Checked	Expert Cate Checking Expert	Giuseppe Florentin		12.2011	
SUBCONTRACTANT / SUBCONTRACTOR					Date 12.2011
Approbat Approved	Responsabil Subcontractant Subcontractant Responsible	A.Stancu - Dinulescu		12.2011	
Intocmit Elaborated	Proiectant Designer	Stefania Gheorghe		12.2011	
Reabilitarea liniei de cale ferata Brasov - Simeria, parte componentă a coridorului IV Pan European, pentru circulația trenurilor cu viteză maximă de 160 km/h, Tronsoanel: Brasov - Sighisoara Rehabilitation of the railway line Brasov - Simeria, component Part of the IV Pan-European Corridor, for the trains circulation with maximum speed of 160 km/h, Section: Brasov - Sighisoara					Proiect/Project 2004/RO18/PPA/003 Faza / Phase: P.Th. / T.D.
Denumire desen / Drawing Title : CLADIREA STATIEI RACOS – TABLOU FINISAJE RACOS RAILWAY STATION BUILDING - FINISHING WORK LIST					
Codificare / Codification System		Scara / Scale	LOT / LOT	Nr. / No 01 / 01	
E	A	5	1	0	1
0	1	C	1	1	1
B	B	C	C	0	0
5	1	0	0	6	1