


CUTIE ETANSA PENTRU COPERTINA C1 - SCHEMA MONOFILARA
C1 SEALED BOX FOR CANOPY - SINGLE-WIRE DIAGRAM

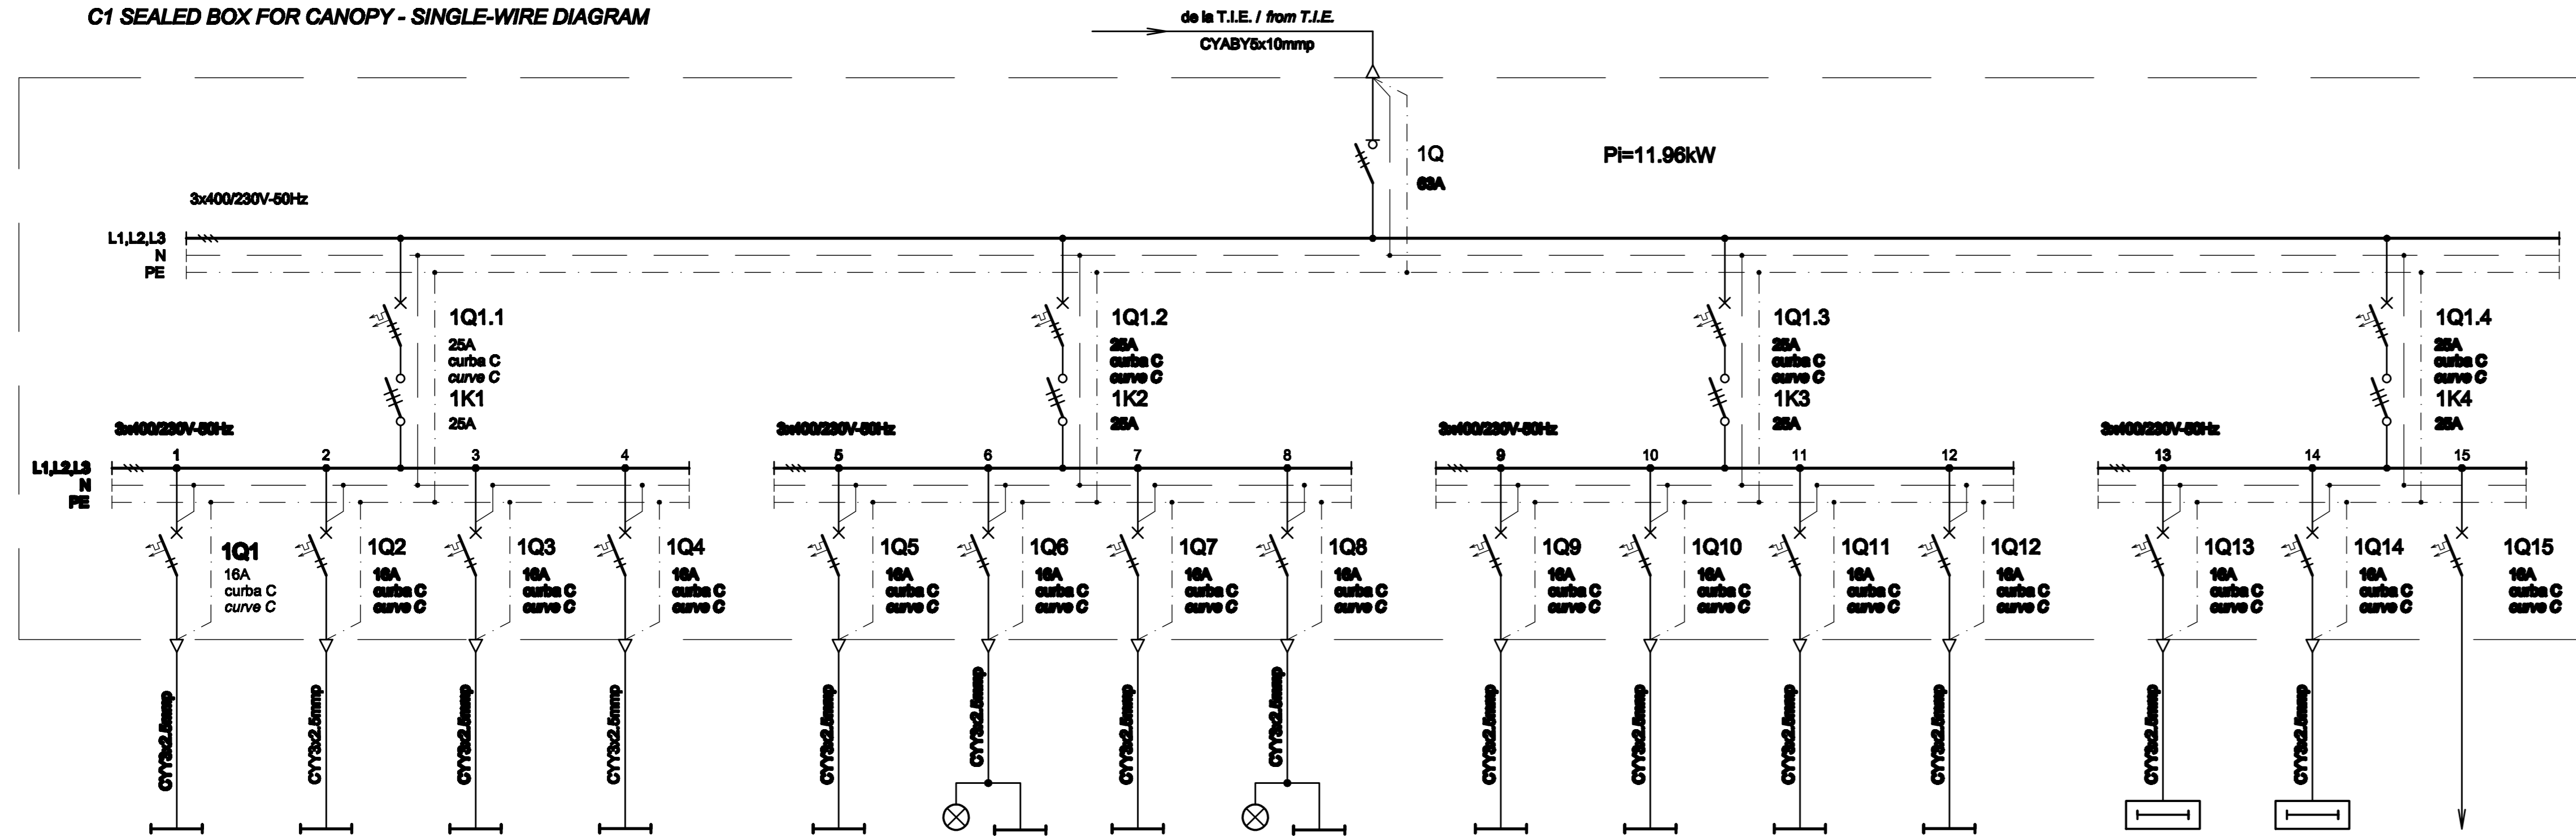

Nr. circuit Circuit number	1	2	3	4
PI [kW]	0.6	0.6	0.7	0.7
Destinația Destination	ILUMINAT PERON PLATFORM LIGHTING 12LL / Lamps	ILUMINAT PERON PLATFORM LIGHTING 12LL / Lamps	ILUMINAT PERON PLATFORM LIGHTING 14LL / Lamps	ILUMINAT PERON PLATFORM LIGHTING 14LL / Lamps

ILUMINAT PERON PLATFORM LIGHTING 12LL / Lamps	ILUMINAT PERON PLATFORM LIGHTING 16LL / Lamps	ILUMINAT PERON PLATFORM LIGHTING 14LL / Lamps	ILUMINAT PERON PLATFORM LIGHTING 18LL / Lamps
---	---	---	---

ILUMINAT PERON PLATFORM LIGHTING 12LL / Lamps	ILUMINAT PERON PLATFORM LIGHTING 12LL / Lamps	ILUMINAT PERON PLATFORM LIGHTING 14LL / Lamps	ILUMINAT PERON PLATFORM LIGHTING 14LL / Lamps
---	---	---	---

PICTOGRAMA - PERON PICTOGRAMS - PLATFORM 5buc. / Pieces	PICTOGRAMA - PERON PICTOGRAMS - PLATFORM 7buc. / Pieces	REZERVA MONOFAZATA SINGLE-PHASE RESERVE
---	---	--

CUTIE ETANSA PENTRU COPERTINA C1 - SPECIFICATIE DE APARATAJ
C1 SEALED BOX FOR CANOPY - EQUIPMENT SPECIFICATION

Nr. No.	Symbol	Denumirea aparatului Equipment denomination	Caracteristici tehnice Technical data	Buc. Pos.	Observatii Remarks
0	1				
1	1Q	Separator de sarcina tripolar Three-poles switch-disconnector	In=63A Un=400V Uimp=6kV f=50Hz Iom=2.2kA	1	
2	1Q1.1,...,1Q1.4	Intreruptor automat tripolar, curba C Three-poles circuit breaker, curve C	In=25A Un=400V Icu=6kA f=50Hz	4	
3	1Q1,...,1Q15	Intreruptor automat bipolar, curba C Two-poles circuit breaker, curve C	In=16A Un=230V Icu=6kA f=50Hz	15	
4	1K1,...,1K4	Contactori electromagnetici tripolari de curent alternativ / Three-poles electromagnetic a.c. contactors	In=25A Un=400A Uc=230V f=50Hz	4	
5	-	Cutie / Box	IP54, Class I / Class I	1	

Indice Index	Data Date	Modificare Modification/Revision	Proiectant Designer	Aprobat Consultant Approved Consultant	Aprobat CFR Approved CFR
D					
C					
B					
A					



Aprobat / Approved		Șef proiect / Project manager		R. Liuzza		Data / Date		Semnătură / Signature	
Aprobat / Approved		Coordonator Secțiune 1 / Section 1 Coordinator		C. Gambelli		12.2011			
Verificat / Checked		Expert Verificator / Checking Expert		G. Fioravanti		12.2011			

Aprobat / Approved		Responsabil Subcontractant / Subcontractant Responsible		A. Stanciu - Dinulescu		12.2011			
Elaborat / Elaborated		Proiectant / Designer		D. Matei		12.2011			

Reabilitarea liniei de cale ferată Brașov - Simeria, parte componentă a coridorului IV Pan European, pentru circulația trenurilor cu viteză maximă de 160 km/h,
Tronsonul : Brașov - Sighișoara
Rehabilitation of the railway line Brașov - Simeria, component Part of the IV Pan-European Corridor, for the trains circulation with maximum speed of 160 km/h,
Section : Brașov - Sighișoara

Project/Project
2004/RO/16/PPA/003
Faza / Phase:
D.E. / E.D.

Denumire desen / Drawing Title :
**Cutie etanșă pentru copertină C1 - Stația Bod;
Bod station - C1 sealed box for canopy**

Codificare / Codification System	Scara / Scale	LOT / LOT	Nr. / No 01 / 01
E A 5 1 0 1 E 0 5 B X I E 0 0 2 1 0 5 1 1			