Vedere A - A
Scara 1:100

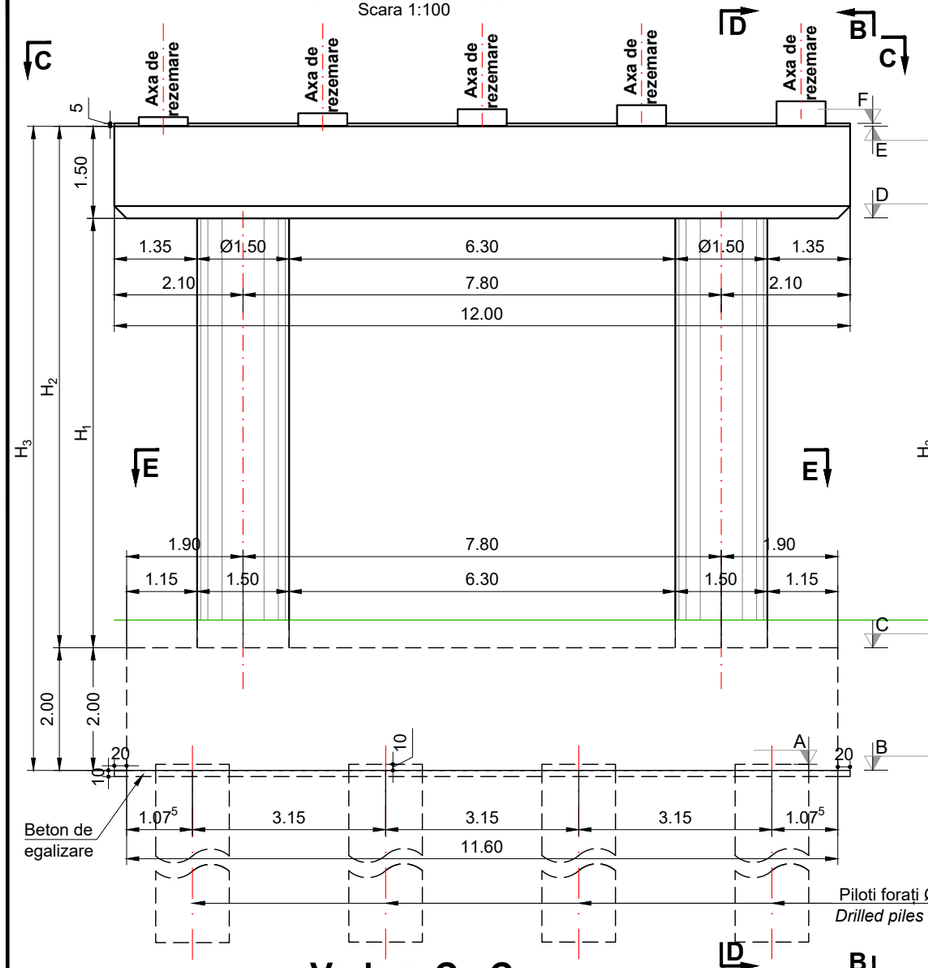

Vedere B - B
Scara 1:100

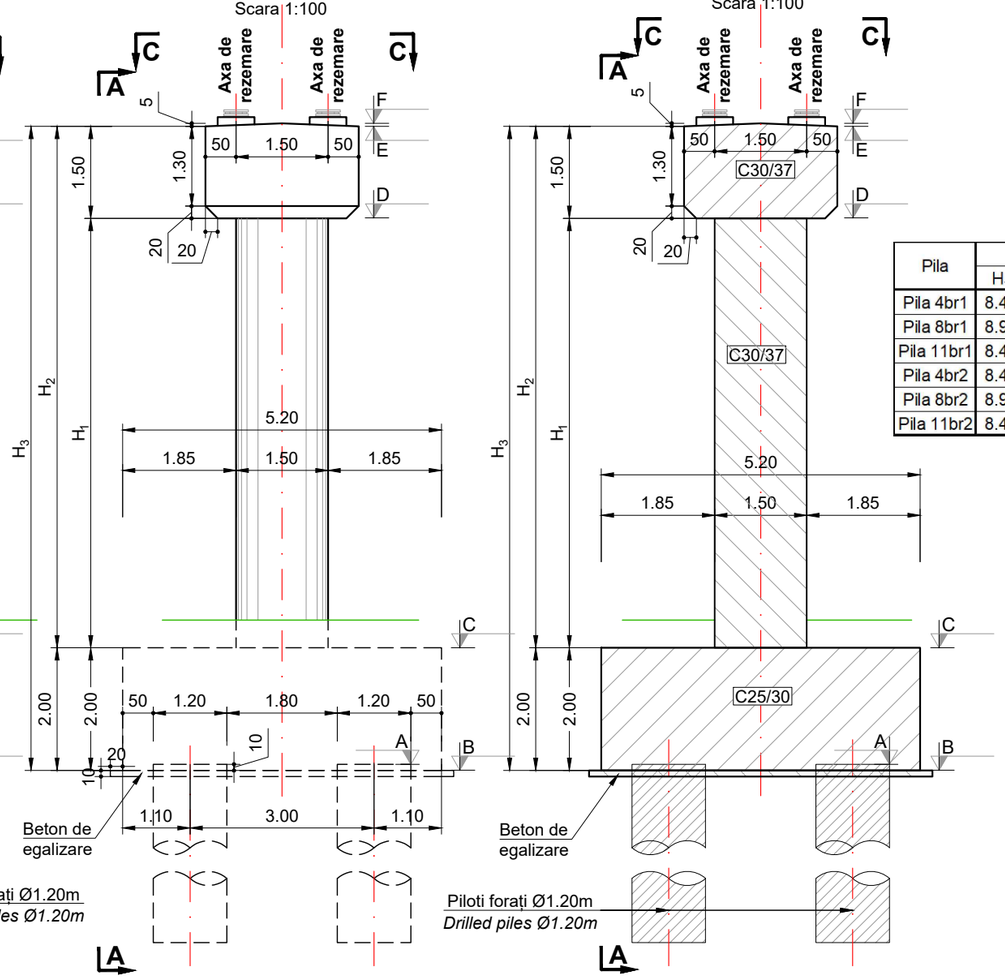

Secțiune D - D
Scara 1:100

Pila	Inaltimi			Cote de nivel					
	H_1	H_2	H_3	A	B	C	D	E	F
Pila 4br1	8.45	9.95	11.95	88.37	88.27	90.57	99.02	100.52	100.57
Pila 8br1	8.95	10.45	12.45	88.22	88.12	90.42	99.37	100.87	100.92
Pila 11br1	8.45	9.95	11.95	88.34	88.24	90.54	98.99	100.49	100.54
Pila 4br2	8.45	9.95	11.95	88.37	88.27	90.27	98.72	100.22	100.27
Pila 8br2	8.95	10.45	12.45	88.20	88.1	90.10	99.05	100.55	100.60
Pila 11br2	8.45	9.95	11.95	88.29	88.19	90.19	98.64	100.14	100.19

IORDĂNESCU I. CONSTANTIN
ROMANIA MLPAT NR: 213 A4, B2, D2
INGINER VERIFICATOR PROIECTE

Vedere C - C
Scara 1:100

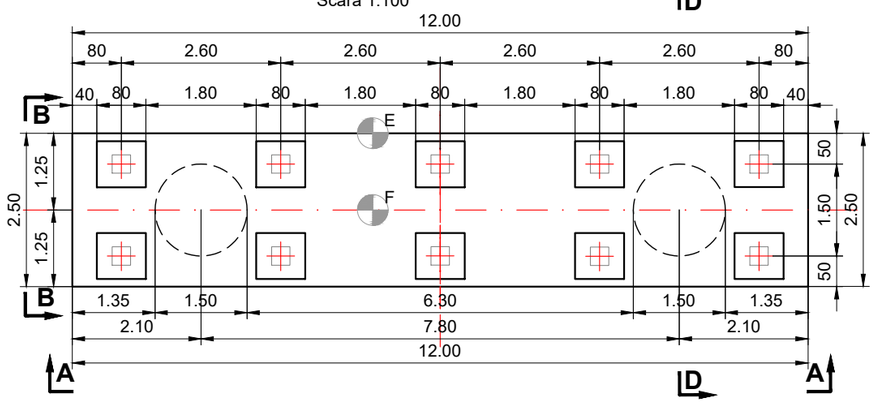

Secțiune E - E
Scara 1:100

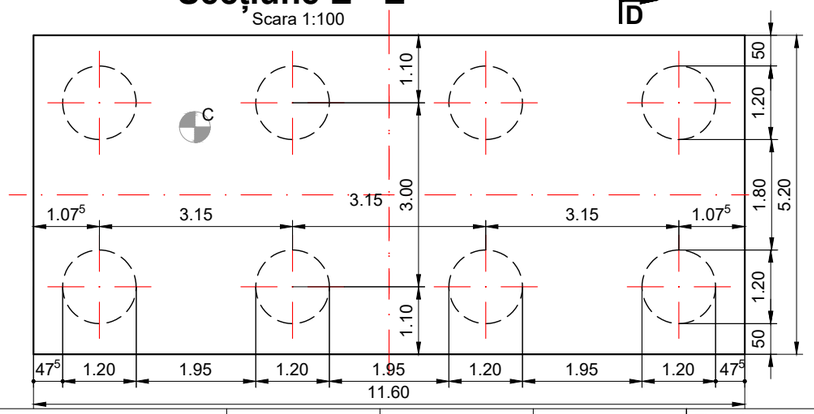

Materiale

Beton

Element	Clasa de rezistenta	Clasa de expunere	Raport A/C	Clasa de cloruri	Dozaj ciment [kg]	D_{max} [mm]	Consistenta
Beton egalizare	C12/15	X0	-	1.00	-	32	S4
Piloti forati	C25/30	XC2	0.55	0.20	375	22.4	S3
Radiere	C25/30	XC2; XF2	0.55	0.20	300	32	S3
Elevatii	C30/37	XC4; XF4; XD1	0.45	0.20	340	32	S3

PROIECTANT / *DESIGNER:*
S.C. CONSITRANS S.R.L.

BENEFICIAR / *BENEFICIARY:*
MUNICIPIUL ARAD, MUNICIPIUL ORADEA, CONSILIUL JUDETEAN ARAD, CONSILIUL JUDETEAN BIHOR
CNAIR

INVESTITIA / *INVESTMENT*:
ACTUALIZARE/COMPLETARE/REVIZUIRE (S.F. + P.A.C. + P.O.E + P.T.E.) "DRUM EXPRES ARAD ORADEA"
ACTUALIZATION/COMPLETION (S.F. + P.A.C. + P.O.E + P.T.E.) "EXPRESS ROAD ARAD ORADEA"

FAZA PROIECTARE / *DESIGN STAGE:*
PROIECT TEHNIC DE EXECUTIE / *EXECUTION TECHNICAL PROJECT*

Contract /*Contract:* 14724/01.07.2021
Proiect /*Project no.:* 001/2021
Data / *Date:* *11.2023*
Scara /*Scale:* *1:100*

	NUME / *NAME:*	SEMNATURA / *SIGNATURE:*
FUNCTIA / *POSITION:*		
COORDONATOR DE PROIECT/ *PROJECT MANAGER*	ing. S. VEACESLAV	
SEF PROIECT SPECIALITATE / *TEAM LEADER*	ing. D. COVELTIR	
PROIECTAT / *DESIGNER:*	ing. V. URDAREANU	
VERIFICAT / *INTERNAL CHECKER:*	ing. D. COVELTIR	

Titlu plansa / *Drawing title:*

Plan cofraj pila P4,P8,P11

Pier formwork P4,P8,P11

Pasaj pe DL HU la km 4+870 peste CF si DN79B
Bridge on DL HU at km 4+870 over CF and DN79B

LUCRARI DE POD / *BRIDGE WORKS*

Cod plansa / *Drawing code*:
CST-0121-PTE-0-DX-**02-P67-CPP-02-R00**

REV/ *REV.*	DATA/ *DATE:*	DETALII REVIZIE / *REVISION DETAILS:*	PROIECTAT / *DESIGNER:*
R00	*11.2023*	*Proiect Tehnic de Executie*	*Consitrans*

UNIUNEA EUROPEANĂ
Instrumente Structurale 2014-2020

PROIECT CO-FINANȚAT DIN FONDUL DE COEZIUNE, PRIN PROGRAMUL OPERAȚIONAL INFRASTRUCTURĂ MARE /
PROJECT CO-FINANCED FROM THE COHESION FUND,THROUGH THE LARGE INFRASTRUCTURE OPERATIONAL PROGRAM