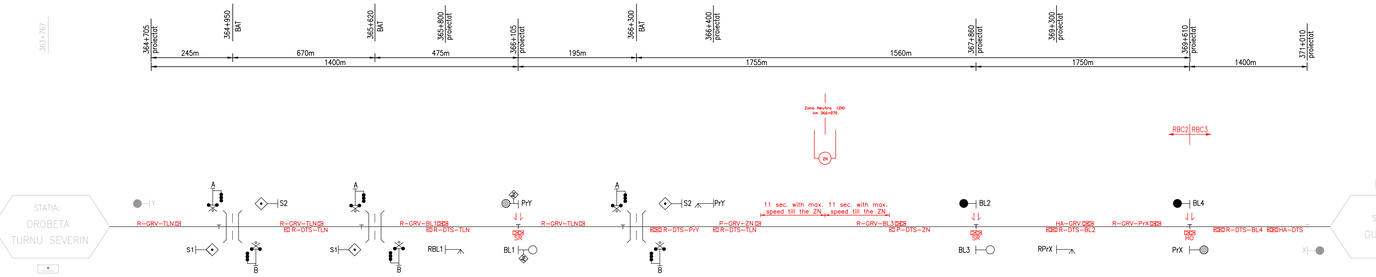

Balise Group Identification	Identificarea Grupului de Balize
First Eurobalise of BG Second Eurobalise of BG a-bcd-e → "Nominal Direction" of BG a → BG Function: C: Radio Connection A: Level Transition Announcement (L0>L2) D: RBC Disconnection P: Neutral zone, Recalibration R: Recalibration LT: Level Transition (Traditional Signaling System > ERTMS) (ERTMS > Traditional Signalling System) SR: Stop if in "Staff Responsible" Mode HA: RBC handover announcement HO: RBC handover order bcd → ID-Station: DTS (Drobeta Turnu Severin), GRV (Gura Vaii) e → Referred Object BG type R, SR: next signal or level crossing BG type P: Neutral zone axis in KM	Prima Eurobaliza de BG A doua Eurobaliza de BG a-bcd-e → "Directia Nominala" of BG a → Functia BG: C: Conexiunea Radio A: Nivelul de Tranzitie Anuntat (L0>L2) D: Deconectare RBC P: Zona Neutra, Recalibrare R: Recalibrare LT: Tranzitie de Nivel (Sistemul de Semnalizare Traditional > ERTMS) (ERTMS > Sistemul de Semnalizare Traditional) SR: Stop daca in Modul "Staff Responsible" HA: Anunturie handover RBC HO: Ordinul de handover RBC bcd → ID-Statiion: DTS (Drobeta Turnu Severin), GRV (Gura Vaii) e → Obiect de Referinta BG tip R, SR: semnal urmator sau trecerea la nivel BG tip P: Zona neutra axei in KM
SYMBOLS	**SIMBOLURI**
BALISE GROUP	GRUP DE BALIZE
bcd-e bcd-e END Of AUTHORITY (EoA) – "bcd" Station Name Acronym – "e" Referred Signal	bcd-e bcd-e Sfârsitul MA (EoA) – "bcd" nume statie acronim – "e" Semnal de Referinta
bcd-e bcd-e EoA with RELASE SPEED – "bcd" Station Name Acronym – "e" Referred Signal	bcd-e bcd-e Sfârsitul MA cu viteza de eliberare – "bcd" NUME STATIE ACRONIM – "e" Semnal de Referinta
Joint	Joanta
km x.xxx ZN Neutral zone	km x.xxx ZN Zona Neutra
ERTMS signalling sketches of stations (incl. station entry signals) are given in separate dedicated drawings.	Schite de semnalizare ERTMS ale statiilor (inclusiv semnalele de intrare) in statie) sunt incluse in desene dedicate separate.
Distance between a station entry signal and a related recalibration balise group is approx. 200m	Distanta dintre semnal de intrare in statie si referitor grupa de balize de recalibrare este approx. 200m
Distance between a station exit signal and a related recalibration balise group is approx. 200m	Distanta dintre semnal de iesire din statie si referitor grupa de balize de recalibrare este approx. 200m
Distance between a level crossing and a related recalibration balise group is approx. 100m	Distanta dintre trecere de nivel si referitor grupa de balize de recalibrare este (approx. 100m)

CLIENT / CLIENT — C.N.C.F. "C.F.R." - S.A.

CONSULTANT / CONSULTANT

Faza Phase	Pozitia Position	Nume Name	Data Date	Semnatura Signature
Aprobat Approved	Manager de Proiect Project Manager	Sergio MENICHINI	09.2020	
Verificant Checked	Expert Cheie Key Expert	PINO AMODIO	09.2020	
Intocmit Elaborated	Proiectant Designer	Pino AMODIO Tetiana KRAVICH	09.2020	

SUBCONSULTANT / SUBCONSULTANT

Aprobat Approved	Responsabil Subconsultant Subconsultant Responsible			
Intocmit Elaborated	Proiectant Designer			

Studia de Fezabilitate pentru Reabilitarea liniei feroviare Craiova - Drobeta Turnu Severin - Caransebes, parte a Coridorului Orient/Est Mediteranean -
Feasibility Study For The Rehabilitation Of The Railway Line Craiova - Caransebes

Proiect/Project 74 / 2018
Faza/Phase S.F.

Denumire / Title : INTERVAL/ SECTION DROBETA TURNU SEVERIN - GURA VÂII
Schita cu semnalizarea / Signalling sketch

Codificare / Codification System

E 2 1 8 I S F 3 1 D X S E 2 0 0 0 0 1 1

Istoricul revizilor / Revision History

Rev.	Data/Date	Descriere Modificare / Modification description
1		
2		
3		
4		

Responsabilitatea privind această publicație revine integral autorului. Uniunea Europeană nu este responsabilă pentru modul în care sunt utilizate informațiile publicate.
The contents of this publication are the sole responsibility of (name of the implementing partner) and do not necessarily reflect the opinion of the European Union.

ESTE INTERDISA MULTIPLICAREA PRIN ORICE MIJLOC A PREZENTEI LUCRARI, PRECUM ȘI COMUNICAREA ACESTEIA PRIN ORICE MIJLOC UNOR TERȚE PERSOANE FIZICE SAU JURIDICE FĂRĂ ACORDUL PREALABIL AL ELABORATORULUI
ESTE INTERDISA MULTIPLICAREA PRIN ORICE MIJLOC A PREZENTEI LUCRARI, PRECUM ȘI COMUNICAREA ACESTEIA PRIN ORICE MIJLOC UNOR TERȚE PERSOANE FIZICE SAU JURIDICE FĂRĂ ACORDUL PREALABIL AL ELABORATORULUI
ESTE INTERDISA MULTIPLICAREA PRIN ORICE MIJLOC A PREZENTEI LUCRARI, PRECUM ȘI COMUNICAREA ACESTEIA PRIN ORICE MIJLOC UNOR TERȚE PERSOANE FIZICE SAU JURIDICE FĂRĂ ACORDUL PREALABIL AL ELABORATORULUI